

WRRH1 High Bay

INSTRUCTION MANUAL

- Please read the below articles carefully to see how to use this product safely.
- Warning contents and attention contents related to product safety use, please be sure to follow it.

Warning

- This UFO High bay within the input voltage range: 100-277VAC, 50/60Hz.
- If input voltage exceeds this range, it may cause tube failure. Please be sure to operate under correct input voltage.
- Ensure ambient operating temperature of (-)40°C through 50°C.
- Using this UFO High bay in temperatures outside of this range will reduce the UFO High bay lifespan.
- Make sure to turn off power before starting the installation process.


Attention

- IP rating: IP65, can work under wet locations.
- Please keep the UFO High bay away from any corrosive substance. When you clean it, please use damp or dry cloth.


Model Number	WRRH1A1UNVFDXX840BR WRRH1A1UNVFDXX850BR	WRRH1B1UNVFDXX840BR WRRH1B1UNVFDXX850BR	WRRH1C1UNVFDXX840BR WRRH1C1UNVFDXX850BR	WRRH1D1UNVFDXX840BR WRRH1D1UNVFDXX850BR
Power	100W	150W	200W	240W
Input Current	1.1A	1.65A	2.2A	2.64A
Input Voltage	AC100-277V			
Frequency	50/60Hz			

Installation Instruction


1. Lock the hook.

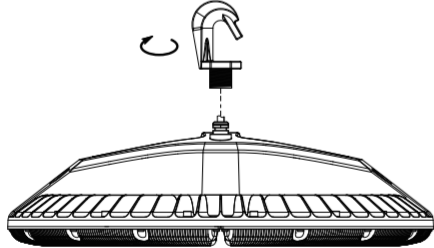


2. Fixing the hook by supplied screw M4*20.

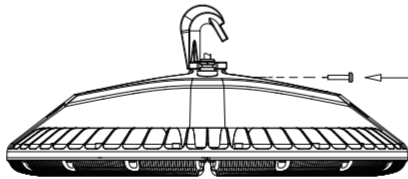


3. Hang up the light

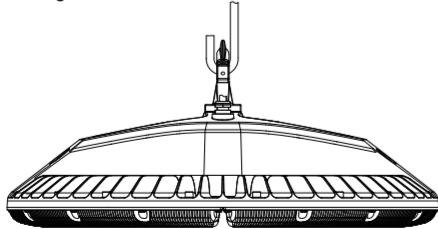

4. Lock the M4*25 screw.

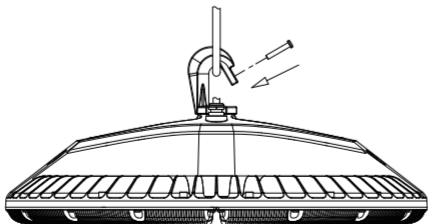

Product Dimension

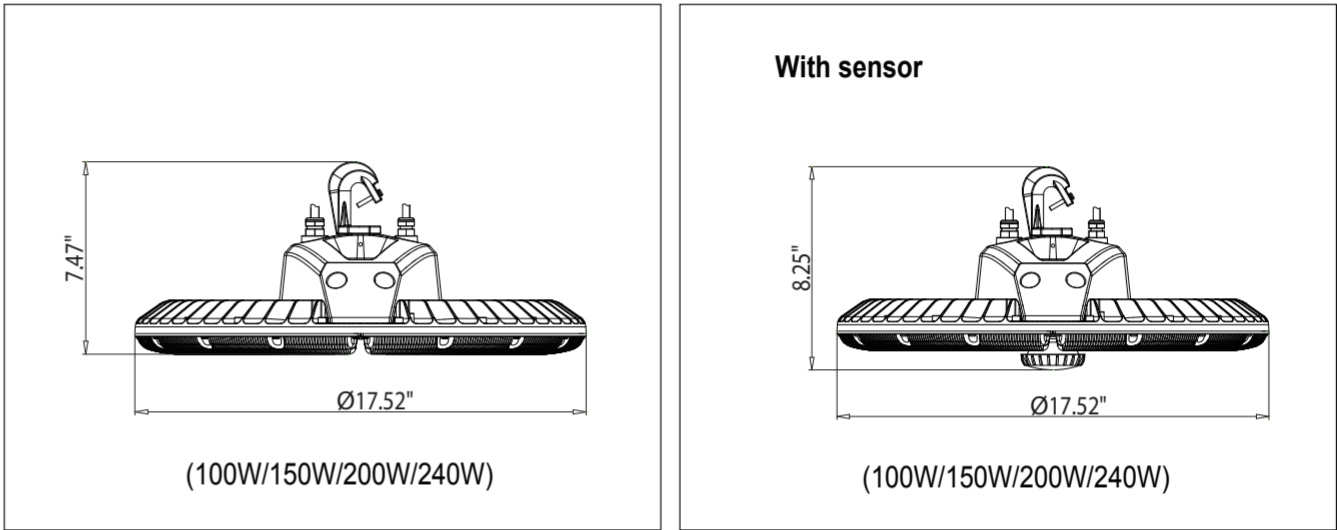


Wiring Connection

Turn off the power, connect AC wire. black wire to L, white wire to N, and green wire to E.

Dimmer connection (With dimmable driver.)

1. Compatible with 1-10V dimming.
2. Connect wires as below, purple wire is D +, gray wire is D -, cap black wire.

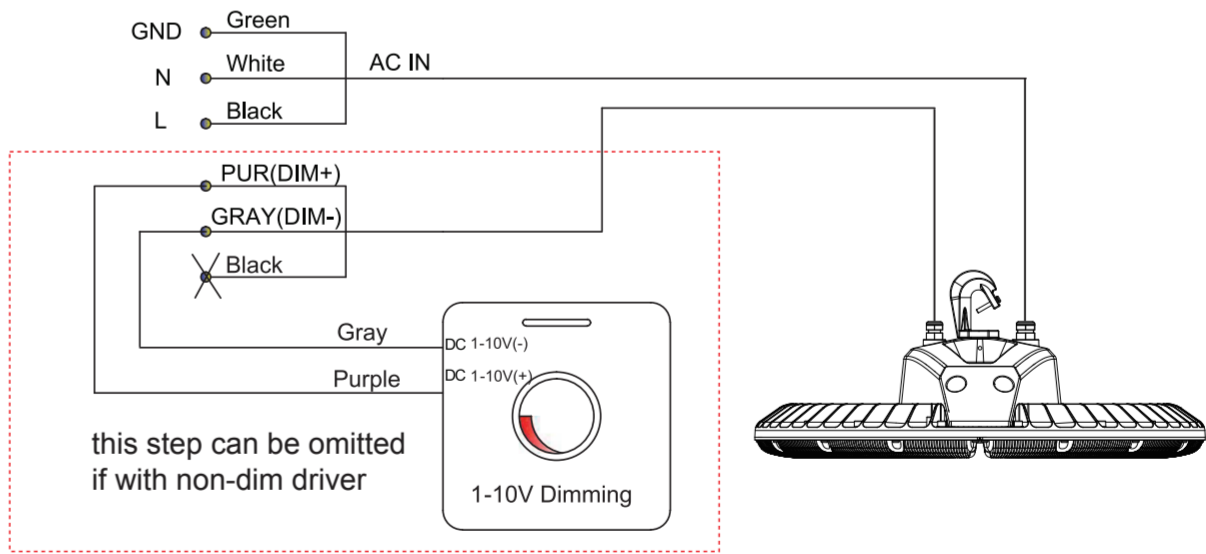

The Installation must be carried out by a qualified electrician.