

## ELRUB

### Features and Specifications

#### Applications

Locations where emergency lighting is needed.

#### Features

- Fully adjustable, glare free, LED lamp heads.
- Ni-Cad Premium battery.
- Push-to-test switch.
- LED charge indicator.
- Universal mount pattern back plate knockout.

#### Certification & Listings

- UL 924.
- UL Damp Location.

#### Construction

Injection-molded, high impact, UV-stabilized UL 94 V-0 thermoplastic housing. Available in black and white.

#### Electrical

120 or 277 VAC operation. Emergency power with standard battery back up of 90 minutes of emergency lighting.

#### Rated Life

50,000 hours.

#### Ambient Operating Temperature Range

20°C to 30°C [68°F to 86°F]

#### Warranty

Orion LED fixtures are covered by a five-year limited warranty. Accessories and individual components are covered by separate OEM supplier warranties.



### Part Numbering Example

Product Series	Housing Color	Voltage	Electrical Operation	Mounting Options
<b>ELRUB</b>	<b>W</b>	<b>UNV</b>	<b>BB</b>	<b>UM</b>

### Ordering Information

Product Series	Housing Color	Voltage	Electrical Operation	Mounting Options
<b>E</b> = Emergency Lighting <b>L</b> = LED <b>R</b> = Round Heads <b>U</b> = Universal Mount <b>B</b> = Battery Back-up	<b>W</b> = White <b>B</b> = Black	<b>UNV</b> = Dual Voltage, 120v or 277v	<b>BB</b> = Battery Back-up	<b>UM</b> = Universal Mount to Junction Box

### Options and Accessories


Fixture Option
<p><b>HL</b>= High Lumen</p> <p><b>WG</b>= Wire Guard</p> <p><b>CC</b>= Clear Cover Guard</p>
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Clear Cover Guard Example</p> </div> <div style="text-align: center;">  <p>Wire Guard Example</p> </div> </div>



## ELRUB

### Physical and Performance Information<sup>1</sup>

Product Series	Wattage @ 120v	Length	Height	Width	Weight
ELRUB	0.56w	10.0"	4.7"	2.75"	4 lbs.

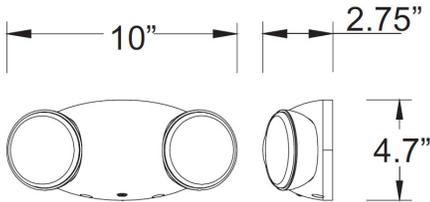

### Additional Specification Information

<sup>1</sup> Actual performance may vary by up to +10% of values listed