

HQAS

HARRIS LED QUICK ACCESS STRIP, GEN 1



HIGH EFFICACY • HIGH EFFICACY • HIGH EFFICACY

3.5x LIFE*

1 3.5x LIFE
The HQAS1 L70 rating at 177,000 hours is over 3.5x as long as the typical LED retrofit tubes alternatives while providing more energy savings.



2 ONE PIECE FULLY ASSEMBLED
4' and 8' fixture sizes in an unibody design arrives factory pre-assembled, configured to order.



3 FIELD ADJUSTABLE CCT
Field Adjustable CCT in 3500K, 4000K, and 5000K with the configuration of the fixtures switch.



4 GLARE DIFFUSION
Sleek, matte lens provides glare diffusion in the work place. Optional translucent end caps allow for seamless continuous run.

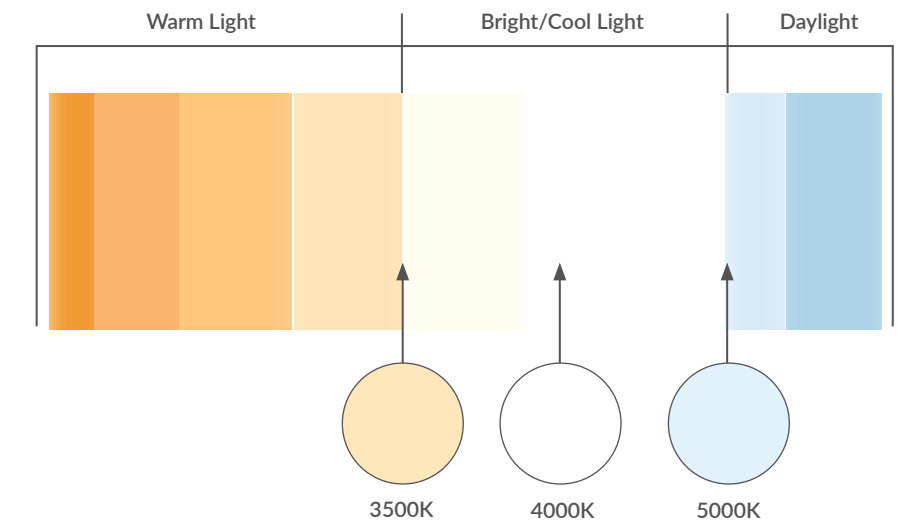


6 QUICK ACCESS
Spring loaded buttons allow for fast access to internal electronic components for field maintenance and ease of installation. Lens is attached to the fixture body with hanging cables for a single person installation.


5 FLEXIBLE MOUNTING SOLUTIONS
This fixture can be surface or suspended mounted in 4' or 8' increments individually or continuously.

CONTROLS & ACCESSORIES


Factory or Field Installed options



Battery Backup



Continuous Mount Surface Plate



Continuous Mount Suspended Plate



Microwave Sensor

Available in lumen packages from 3,000 to 8,000 in 4 ft. and 8 ft. lengths. 120-277v
*LED rated life based on HQAS14C1UNVFD8CS L70 @ 25C ambient vs. Orion's TLEDB5 retrofit LED tubes.