


LDRES2 HARRIS LED TROFFER RETROFIT LDRE S SERIES GEN 2



1 4.5X LIFE
The LDRES2 L70 rating at 238,000 hours is over 4.5x as long as the typical LED tube retrofit alternative while providing full configurability, controllability, more energy savings and a new look.



2 QUICK INSTALLATION
The original patented ceiling grid adapter bracket system allows for quick installation without disrupting the ceiling grid. Standard bracket included.

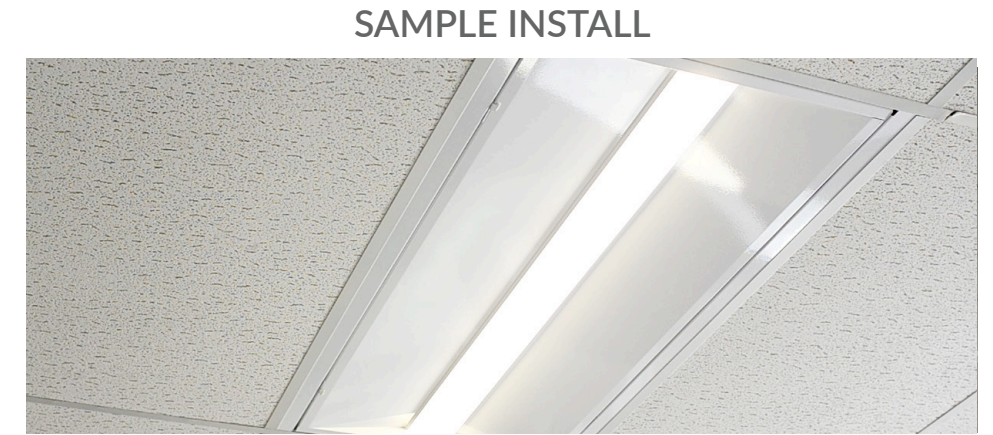

7 DURABLE PREMIUM COMPONENTS
Top tier electrical components from suppliers with brand and quality integrity. Up to 138 lumens per watt.

3 ONE PIECE FULLY ASSEMBLED
Lightweight unibody design arrives factory pre-assembled, configured to order.

4 QUICK LATCH DOOR FRAME
Hinge and latch system mimics existing door frame system and allows for ease of install and access.


6 UPGRADE ROOM AESTHETICS
LDRES2 has a clean and modern design with matte finish contour lens.

5 STEEL BODY
Durable white painted steel frame.

FAST SINGLE PERSON INSTALL



ACCESSORIES
Field installed options available.

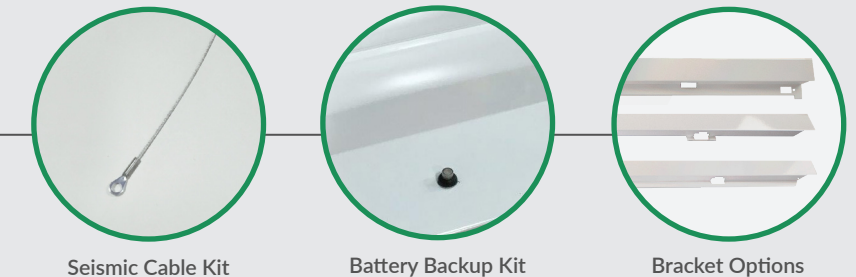

Available in lumen packages from 2,000 to 3,500 lumens in 2' x 2' and up to 4,000 lumens in 2' x 4'. 120v-277v
*LED rated life based on LDRES2B1UNVFDXX8352MST L70 @ 25C ambient vs. Orion's TLED B5 retrofit LED tubes.

