



WTLED2

APOLLO® ENCLOSED WET LISTED HIGH BAY GEN2 | WTLED2

Extreme energy savings for demanding interior environments that require a wet-rated enclosed fixture, including agricultural, industrial and warehouse applications. The optional durable IK04*, IK10** wireguard is excellent for high impact environments like gymnasiums and athletic clubs.

* Lens impact resistant up to IK04 lens.

** With fixture wire guard, impact resistant up to IK10.



Proudly manufactured in
AMERICA

orion™

orionlighting.com | 1.800.660.9340

APOLLO® WET LISTED

WTLED2

	Orion	Average Competitor
Average lumens	12,000	12,006
1 Watts used	91	108
Lumens per watt	135	114
Average lumens	23,000	22,964
2 Watts used	163	201
Lumens per watt	141	117
Average lumens	32,000	31,755
3 Watts used	242	261
Lumens per watt	133	124



PERFORMANCE AND FEATURES

Using the most efficient and latest LED technology, Orion's wet-listed fixtures are proven to provide up to 143 LPW, are available in 120-277v, 347v and 480v options, and come standard with 10 kA surge protection. The bi-level, dual circuit dimming option delivers high and low light levels in one fixture for aisle areas with minimal traffic. In agricultural applications, the bi-level feature can be used for Long-Day Lighting and is recognized to boost animal productivity, which leads to higher profits and a higher return on investment. Available in bronze or granite thermoset powder-coat finish.



CERTIFICATIONS AND IMPACT PROTECTION RATING

IP65 Rated, UL1598 Listed for wet locations, Buy American Act Compliant, DLC. Standard fixture has an impact protection rating up to IK04. The robust wire guard option for lens/sensor has an impact protection rating of IK10.




MODULAR AND UPGRADEABLE

The modular design allows your maintenance crew to easily keep pace as technology evolves or to improve efficiency using the fixture's existing platform. Upgrade in the future to new light distribution requirements, such as moving from an open area to aisle lighting, or from high to low bay application settings.



UP TO 71%*
ENERGY REDUCTION

Call or click to find out more:
800.660.9340 | orionlighting.com

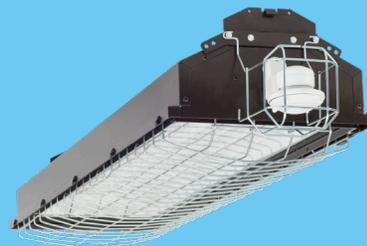

IP65 IK04
IK10

* Product WTLED2C10AUNVFDXXSTLCA850 at 135 watts (19,280 lumens) versus a HID averaging 458 watts. Lens impact resistant up to IK04 lens. With fixture wire guard, impact resistant up to IK10.



VIRTUALLY MAINTENANCE FREE

The wet-listed high bay is virtually maintenance free with a rated life up to 125,000 hours. With an easy-to-remove lens for cleaning/maintenance, the WTLED2 is designed to provide a lifetime of worry-free operation.



FAST LEAD TIMES

Made in Wisconsin. Buy American Compliant. Minimal lead times mean you start saving money faster by reducing your energy consumption sooner. Site preparation is minimized using Orion's kitted packaging option, available in single or bulk packaging.



FIVE YEAR WARRANTY OPTION

Reduce your risk with a five year APOLLO® Class limited warranty.