

Keilton + autani

WP1013S Series

3-Key Line Voltage BT Wall Switch



WP1013S.A0

Description

The Keilton+autani WP1013S is a line-voltage Bluetooth wireless wall switch. It provides wireless control of Keilton+autani devices, enabling ON/OFF, DIM+, and DIM- functions. WP1013 can be used to retrofit a standard wall switch.

Features

- 120-277VAC
- Ideal retrofit of existing wall controls (neutral is required)
- Quick push-button control of Keilton+autani devices via Bluetooth
- Bluetooth 5.0 network technology enables the switch to be linked to one or more light groups via the Keilton+autani app

Requirements

- Requires a Decora switch plate (not included)


Specifications

Input Voltage	AC120-277V
Frequency	50/60Hz
Input Current	10mA Max
Bluetooth Transmit	100ft Max
Radio Frequency	2.4GHz ± 75MHz
Bluetooth Version	5.0
Housing Material	UL 94-5VA
Operating Temperature	0°C to 40°C, 32°F to 104°F
Storage Temperature	-30°C to 85°C, -22°F to 185°F
IP Rating	IP20
Color	Plate/White, Housing/Black
Warranty	5 year warranty
Compliance	UL60730, UL1376, RoHS
Safety	cULus Listed LED Controller E347437 FCC ID: 2A26YWP1013S DID: D061367 DLC: NLTRC5KL0TN

Ordering Information


Model	Description
WP1013S.A0	3-Key Line Voltage BT Wall Switch

Wiring

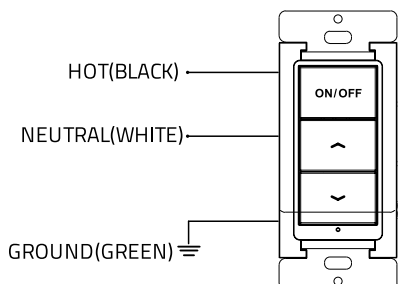


Dimensions

Unit:inch/mm

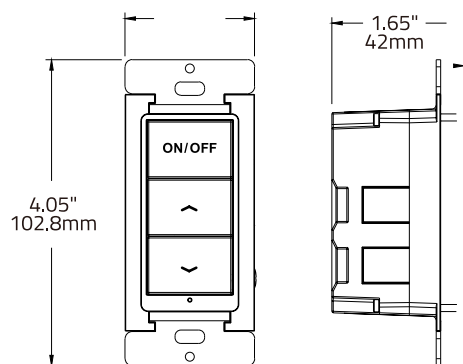

Product Label

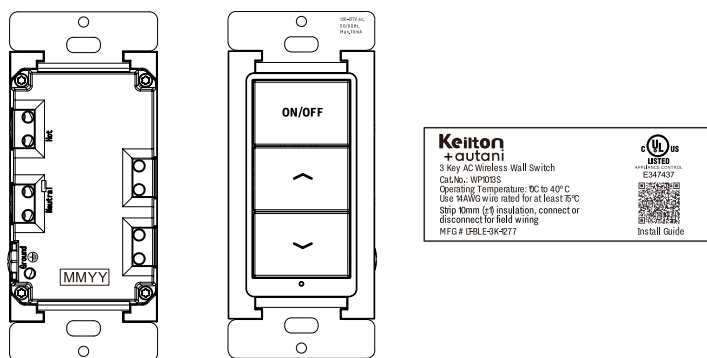

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by LiteTrace is under license. Other trademarks and trade names are those of their respective owners.

App Download



Due to our continued efforts to improve our products, specifications are subject to change without notice.

Contact Us

7090 Columbia Gateway Drive, Suite 140, Columbia, MD 21046, USA

T: +1 443-320-2233 (M-F 9am-5pm ET)

E: support@autani.com