


Keilton + autani

WP1015S Series

5-Key Photovoltaic-Powered
BT Wall Switch



WP1015S.A0

Description

The WP1015S is a photovoltaic-powered Bluetooth wireless scene controller. It provides wireless control of Keilton+autani devices, enabling ON/OFF, DIM+/DIM-, AUTO, and 3 scene functions. The WP1015S can also be used as remote controller.

Features

- Photovoltaic panel provides additional power supply from room lighting to lessen dependence on battery power
- Powered by single CR2032 battery, USB charging cable, or integrated solar panel
- Quick push-button control of Keilton+autani devices via Bluetooth
- Can be used as a remote controller or mounted to a flat surface

Specifications


Input Voltage	DC 3V/USB 5V
Bluetooth Transmit	100ft Max
Radio Frequency	2.4GHz ± 75MHz
Bluetooth Version	4.2
Housing Material	UL 94-V0
Operating Temperature	-18°C to 50°C, -0.4°F to 122°F
Storage Temperature	0°C to 30°C, 32°F to 86°F
IP Rating	IP20
Color	White
Warranty	5 year warranty
Compliance	UL1376, RoHs
Safety	FCC ID: 2A26YLTKTVT2021 DID: D057145 DLC: NLTRC5KL0TN

Ordering Information


Model	Description
WP1015S.A0	5-Key Photovoltaic-Powered BT Wall Switch

Wiring

Front

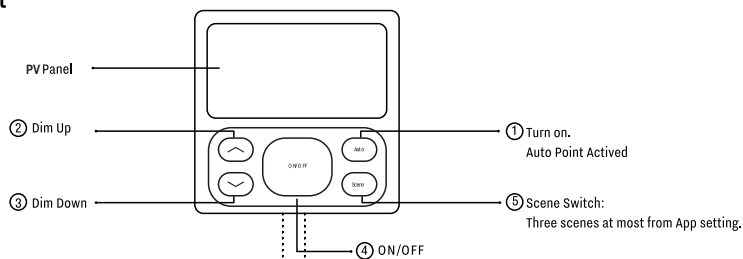


Bottom




Dimensions

Unit: inch/mm

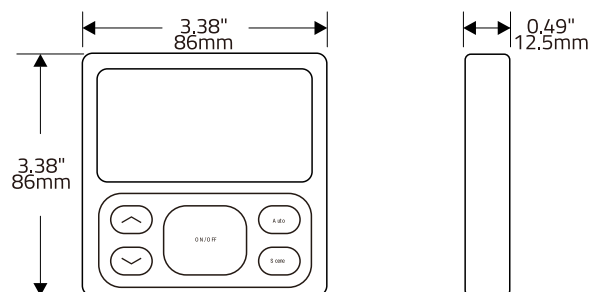

Product Label

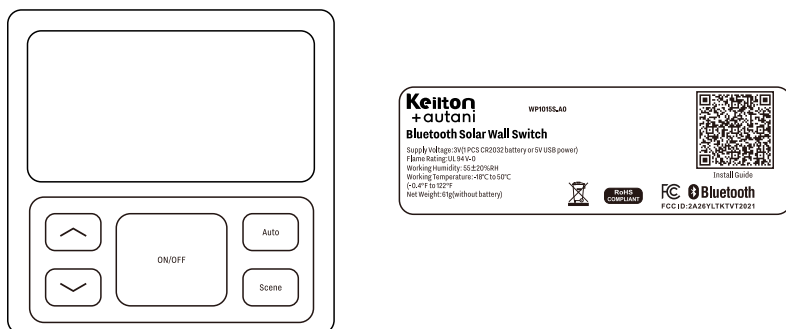

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by LiteTrace is under license. Other trademarks and trade names are those of their respective owners.

App Download



Due to our continued efforts to improve our products, specifications are subject to change without notice.

Contact Us

7090 Columbia Gateway Drive, Suite 140, Columbia, MD 21046, USA

T: +1 443-320-2233 (M-F 9am-5pm ET)

E: support@autani.com