

ELSUB

Features and Specifications

Applications

Where emergency lighting is needed.

Features

- Fully adjustable glare free LED lamp heads.
- Ni-Cad premium battery.
- Push-to-test switch and LED charge indicator.
- Universal mount pattern knockout back plate.
- Self-Diagnostic Runs a 1-minute test every 30 days, as well as a 30-minute test every 6 months.
- Remote capable option provides 12w extra capacity.

Certification & Listings

- UL 924.
- UL Damp Location Listed.
- NEC.

Construction

Injection-molded, high impact, UV-stabilized, UL 924 V-o thermoplastic housing. Available in white or black.

Electrical

UL Listed for Damp Location. 120v or 277v VAC operation. Normal power consumption less than 2.3w. [90] minutes of emergency lighting with "Battery Backup" units.

Rated Life

50,000 hours.

Warranty

Orion LED fixtures are covered by a five-year limited warranty. Accessories and individual components are covered by separate OEM supplier warranties.



Part Numbering Example

Product Series	Housing Color	Voltage	Electrical Operation	Mounting Options
ELSUB	W	UNV	BB	UM

Ordering Information

Product Series	Housing Color	Voltage	Electrical Operation	Mounting Options
E = Emergency L = Lighting S = Square LED U = Universal Mount B = Battery Back-up	W = White B = Black	UNV = 120v or 277v	BB = AC normal operation "Battery Back-up" upon power outage [90 min.]	UM = Universal Mount


Options and Accessories

Fixture Option
SD = Self Diagnostic WG = Wire Guard CC = Clear Cover * RC = Remote Capable; 12 volts additional * RS = Remote single light 6 volts * RD = Remote double light 12 volts * Ordering "Remote capable" allows you to install a single "RS" or double "RD" light in conjunction to combination exit & emergency fixture



Physical and Performance Information¹

Wattage @ 120v - 60 hz	Length	Height	Width	Weight
2.3w	9.84" fixture body 12.31" with light heads	4.5"	3.56"	4 lbs.

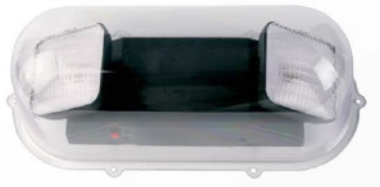


Clear Covers



Wireguard



Remote Lighting

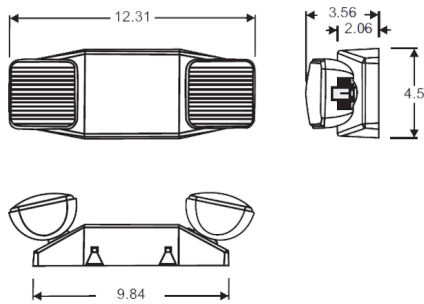

Additional Specification Information

¹ Actual performance may vary by up to +10% of values listed