

## ELWUB

### Features and Specifications

#### Applications

Locations where emergency lighting is needed.

#### Features

- Fully adjustable, glare free, LED lamp heads.
- Ni-Cad Premium 3.6v battery.
- Push-to-test switch.
- LED charge indicator.
- Universal mount pattern back plate knockout.

#### Certification & Listings

- UL 924.
- UL Wet Location Rated.

#### Construction

Injection-molded, high impact, UV-stabilized UL 94 V-0 thermoplastic housing. Standard polycarbonate ribbed sealed housing.

#### Electrical

120 or 277 VAC operation. Emergency power with standard battery back up of 90 minutes of emergency lighting. Ambient temperature operating range 14°F to 104°F (-10°C to 40°C).

#### Rated Life

50,000 hours.

#### Warranty

Orion LED fixtures are covered by a five-year limited warranty. Accessories and individual components are covered by separate OEM supplier warranties.



### Part Numbering Example

Product Series	Housing Color	Voltage	Electrical Operation	Mounting
<b>ELWUB</b>	<b>W</b>	<b>UNV</b>	<b>BB</b>	<b>UM</b>

### Ordering Information

Product Series	Housing Color	Voltage	Electrical Operation	Mounting
<b>E</b> = Exit and Emergency <b>L</b> = LED <b>W</b> = Wet location rated <b>U</b> = Universal Mount <b>B</b> = Battery Back Up	<b>W</b> = White	<b>UNV</b> = Dual voltage, 120v or 277v	<b>BB</b> = Battery Back-up	<b>UM</b> = Universal Mount to junction box

### Options and Accessories


Fixture Option
<b>WG</b> = Wire Guard 



## ELWUB

### Physical and Performance Information<sup>1</sup>

Product Series	Wattage @ 120v	Length	Height	Width	Weight
ELWUB	3.32w	13.33"	5.76"	3.41"	4 lbs.

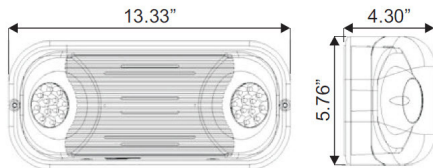

### Additional Specification Information

<sup>1</sup> Actual performance may vary by up to +10% of values listed