


HQAS

HARRIS LED QUICK ACCESS STRIP, GEN 1



1 3.5x LIFE
HQAS1 calculated L70 rating of 177,000 hours is a minimum of 3.5x as long as the typical LED tube retrofit alternative.


2 FULLY ASSEMBLED
4' and 8' fixture sizes in an unibody design arrives factory pre-assembled, configured to order.



3 THREE FIELD ADJUSTABLE CCT OPTIONS
Field Adjustable CCT in either 3500K, 4000K, or 5000K with the configuration of the fixtures switch.



4 LENS DIFFUSION
Sleek, matte lens provides LED diffusion anywhere. Optional translucent end caps allow for seamless continuous run.

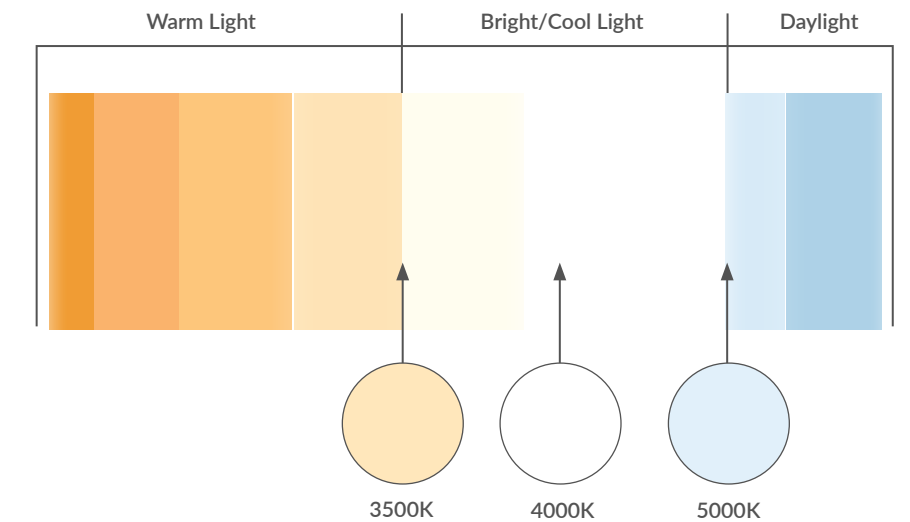

5 FLEXIBLE MOUNTING SOLUTIONS
This fixture can be surface or suspended mounted in 4' or 8' increments - individually or continuously.


6 QUICK ACCESS
Spring-loaded buttons allow for fast access to internal electronic components for field maintenance and ease of installation. The lens is attached to the fixture body with hanging cables for a single person installation.

CONTROLS & ACCESSORIES


Factory or Field Installed options



Battery Backup

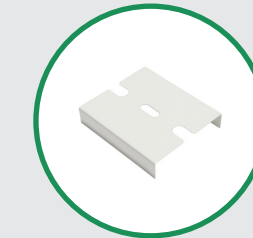

Continuous Mount Surface Plate



Continuous Mount Suspended Plate



Microwave Sensor

Available in lumen packages from 3,000 to 8,000 in 4' and 5,000 to 8,000 lumens in 8'. 120-277v
*LED rated life based on HQAS14C1UNVFD L70 @ 25C ambient vs. Orion's TLEDB5 retrofit LED tubes.

