



LSCS1


HARRIS LUMEN SELECT CANOPY SQUARE, GEN 1

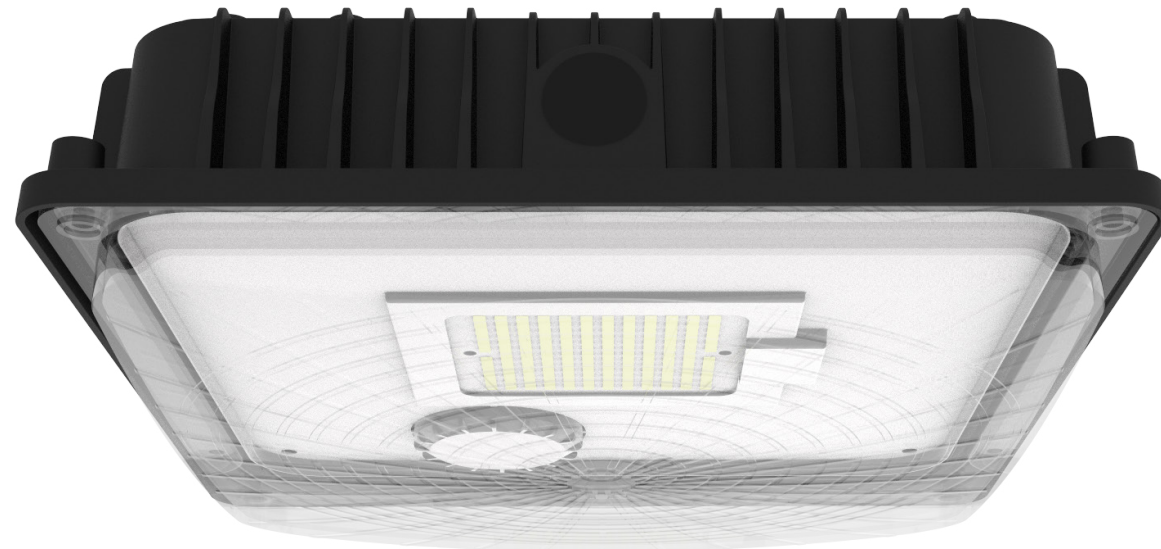

- 1 **3x LIFE**
The LSCS1 L70 rating at 150,000 hours is over 3x as long as the typical HID fixture alternatives while providing more energy savings.
- 2 **ADDITIONAL ENERGY SAVINGS OPTIONS**
Up to 150 LPW. Achieve additional energy savings by selecting the field installed photocell or remote programmable microwave sensor.
- 3 **ROBUST FIXTURE DESIGN**
Sturdy die-cast aluminum housing with UV stabilized powdercoat finish to withstand the outdoor elements with a heat and impact resistant clear polycarbonate lens. 10kV surge protection standard. 120-347v available.

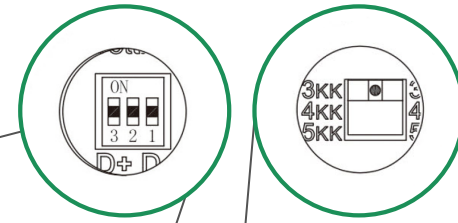


Lumen Output/Fixture Wattage 1	Lumen Output/Fixture Wattage 2	Lumen Output/Fixture Wattage 3
1	2	3

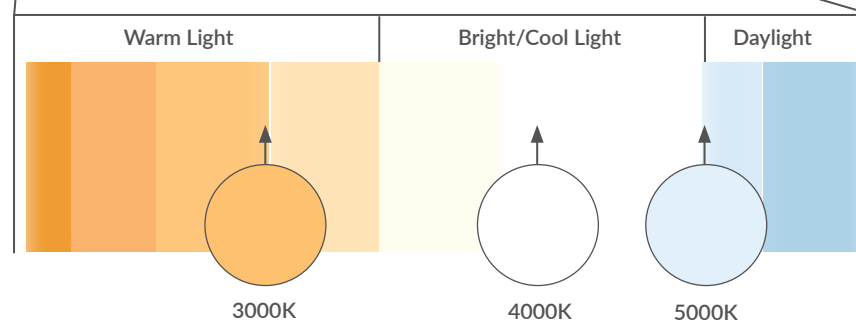

4 FIELD ADJUSTABLE LIGHT OUTPUT
Flexibility to increase or decrease your wattage and lumen output in the field to adapt to different lighting needs with one fixture. The LSCS1 has two fixture sizes to select from and each fixture can be adjusted between 3 lumen outputs/fixture wattages.

5 THREE FIELD ADJUSTABLE CCT OPTIONS
Adjust the color temperature in the field by toggling CCT selector switch. Choose either 3000K, 4000K or 5000K to match your facility needs.

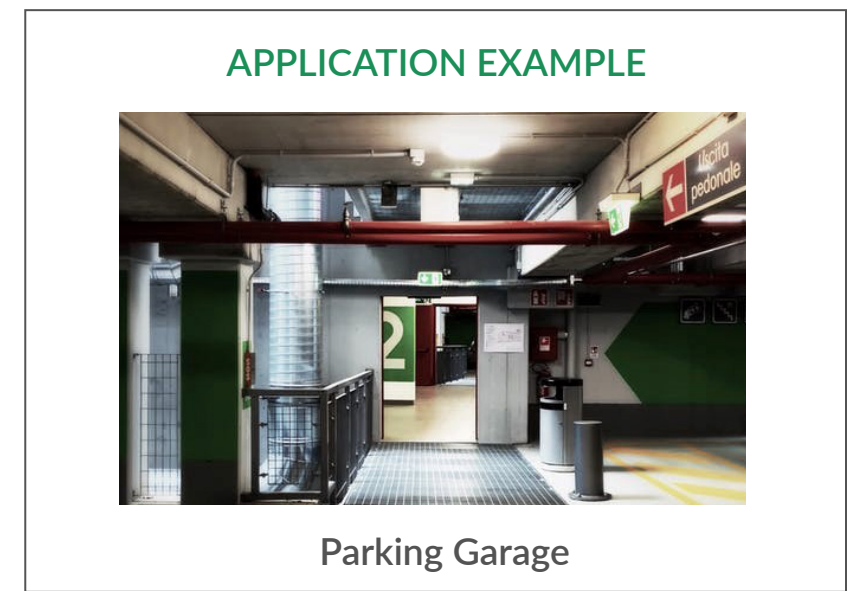

Available in lumen packages from 4,000 to 12,000 lumens. 120v-347v.
*LED rated life based on LSCS1B1UNHFD7CS L70 @ 25C ambient vs. HID Lamps.

