

LSME2 HARRIS LED SURFACE MOUNT, GEN 2



HIGH EFFICACY • HIGH PERFORMING SURFACE MOUNT
161 LPW

1 PERFORMANCE
LSME2 High Efficacy offers the highest performing surface mount in the market at 161 LPW. Wide range of lumen packages from 2,000 to 8,000 lumens.


2 3.5x LIFE*
The LSME2 L70 rating at 179,000 hours is over 3.5x as long as the typical LED tube retrofit alternative while providing full configurability, controllability, more energy savings and a new look.

3 SHIPS FOR EASE OF INSTALLATION
Lightweight aluminum fixture body attaches to surface mount body using no tools. Available with a bulk packaging option that allows for quick surface mounting and wiring in the field.

6 DURABLE PREMIUM COMPONENTS
Top tier electrical components from suppliers with brand and quality integrity.

5 QUICK LATCH SYSTEM
Hinge and latch system allows for ease of install and maintenance access.

4 UPGRADE ROOM AESTHETICS
LSME2 has a clean and modern design with matte finish contour lens. This fixture comes in 1' x 4', 2' x 2', and 2' x 4' sizes.

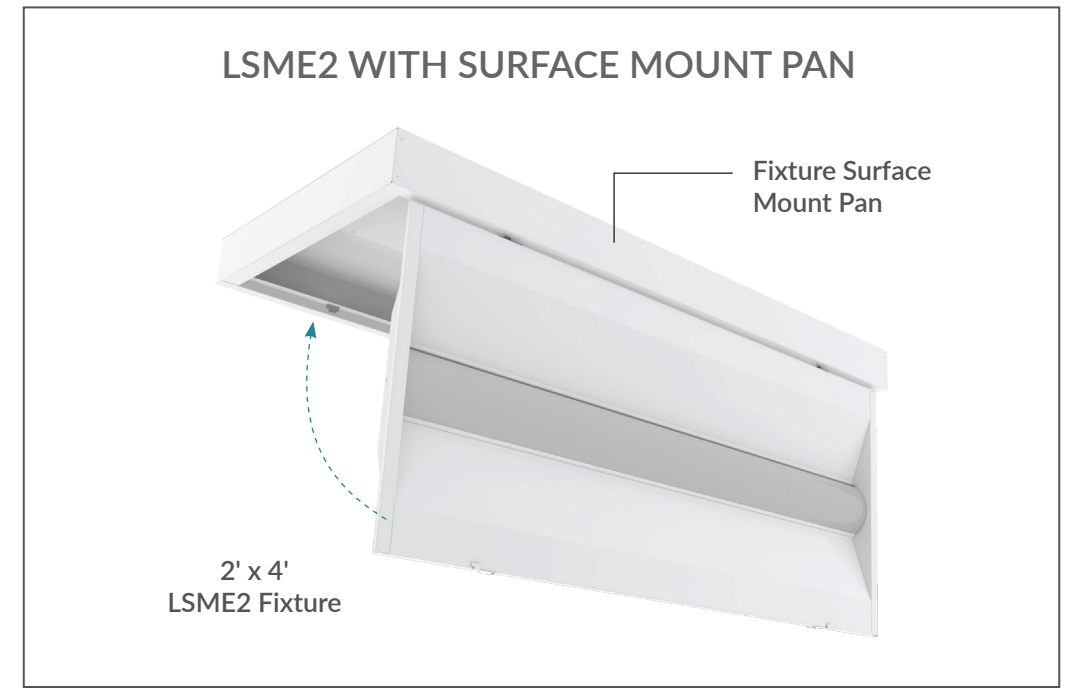

CONTROLS & ACCESSORIES
Factory or field installed options available.



Battery Backup



Integrated Control

Available in lumen packages from 2,000 to 4,000 lumens in 1' x 4' and 2' x 2' and up to 8,000 lumens in 2' x 4'. 120v-277v, 347v
*LSME2 CH1 LED rated life based on L70 LSME2CHUNVFDXX84024M @ 25C ambient vs. Orion's TLEDB5 retrofit LED tubes.

