

LED TROFFER

HARRIS LED SURFACE MOUNT TROFFER, GEN 3

LSME3 SPECIFICATIONS

Fixture Sizes

- 1' x 4', 2' x 2', or 2' x 4'

Lumen Range / LPW

- 2,000 to 8,000 Lumens, up to 165 LPW

Factory Installed Features and Options

- 120-277v and 347v
- 80 CRI; 3500K, 4000K, or 5000K
- Battery Backup
- Different Dimming Capacity Drivers
- Dial Dimmer

Field Installed Options


- Factory Installed Controls and Sensors Available
- Manual Programming Sensors
- Remote Programming Sensors
- On Site Network Programming
- Internet/Cloud Based Network Programming
- CA Title 20 Compliant Battery Backup Available

Certifications / Listings*

- Buy American Act Compliant
- UL/cUL Listed

Mounting Options

- Surface Mounting

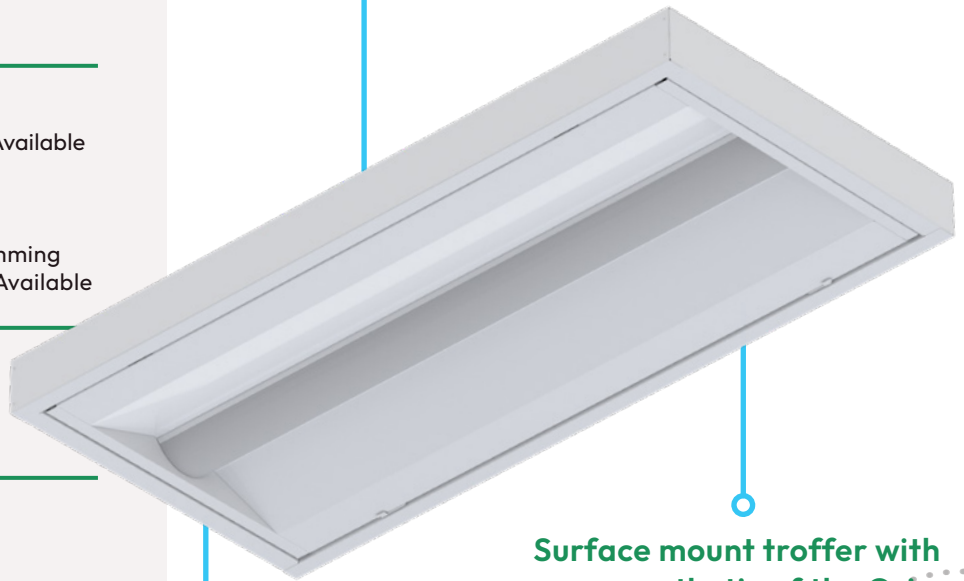

Dial dimmer available for field adjustment of power and lumen output option

Surface mount troffer with same aesthetic of the Orion LDRE3 for continuous look throughout application

Aluminum fixture body and aluminum pan for optimal thermal dissipation to extend the life of electrical components

**Varies by fixture configuration*

800.660.9340 | orionlighting.com

© 2024 Orion Energy Systems, Inc. All right reserved. The Orion logo, ISON™, TritonPro™, and Harris product names are registered trademarks of Orion Energy Systems. All other trademarks are property of their respective owners.

P-INT-XS-240 | Rev. 20241125