

LSSR1

HARRIS LED LUMEN SELECT STRIP RETROFIT, GEN 1



HIGH EFFICACY • HIGH EFFICACY • HIGH EFFICACY



3.8x LIFE*



1 3.8x LONGER LIFE
The LSSR1 L70 rating at 190,000 hours is over 3.8x as long as the typical LED retrofit tubes alternatives while providing more energy savings.

2 GLARE DIFFUSION
Sleek, frosted matte lens provides glare diffusion in the work place.


3 EASE OF INSTALLATION
Retrofits 4' and 8' existing fixtures using 4' sections with flexible design to install over existing 4.25"-5.25" wide fluorescent strip fixtures. Prewired and safety cables come standard for ease of install.

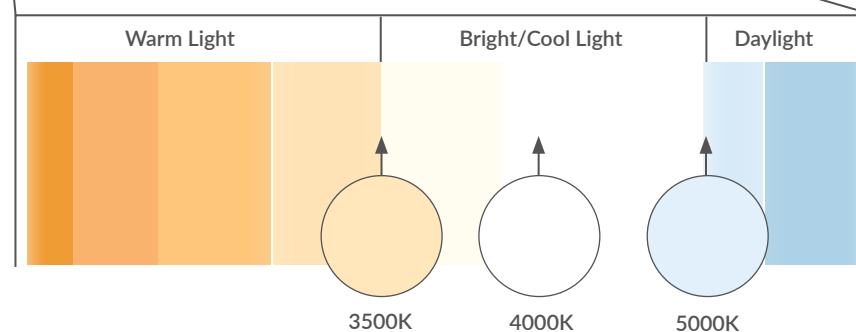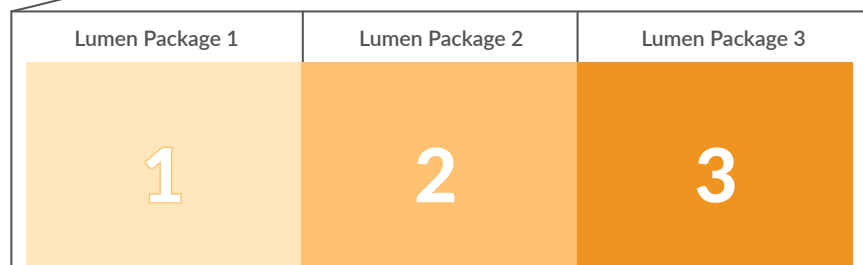

5 FIELD ADJUSTABLE LIGHT OUTPUT
Flexibility to increase or decrease your wattage and lumen output in the field to adapt to different lighting needs with one fixture. Each fixture lumen package can be adjusted between 3 lumen outputs/fixture wattages.

4 THREE FIELD ADJUSTABLE CCT OPTIONS
Adjust the color temperature in the field by toggling CCT selector switch. Choose either 3500K, 4000K, or 5000K to match your facility needs.

CONTROLS & ACCESSORIES
Factory Installed fixture options



Battery Backup

Available in lumen packages from 3,000 to 10,000 in 4' and 8' retrofit lengths. 120-277v
*LED rated life based on LSSR14A1 L70 @ 25C ambient vs. Orion's TLEDB5 retrofit LED tubes.

