

LED WALLPACK

HARRIS LUMEN SELECT WALLPACK FULL CUTOFF, GEN 2

LSWF2 SPECIFICATIONS

Fixture Sizes

- 2 Fixture Sizes Available



Lumen Range / LPW

- 3,000 to 19,000 Lumens, up to 165 LPW
- Each lumen package allows for field adjustment of lumen output



Factory Installed Features and Options

- 120v-277v
- 80 CRI; Field Adjustable CCT from 3000K, 4000K, and 5000K
- Bronze Color Standard
- Control Ready Fixture Base for Easy Sensor Installation
- 10kV/5kA Surge Protection Standard
- Battery Backup Available

Field Installed Options

- Control Options
- Battery Backup Kit



Control Types Available

- Integrated Photocell Standard
- Control ready design allows for fast and easy installation of sensors in the field


Certifications / Listings*

- Dark Sky Compliant
- DLC® Listed Premium
- IP65
- cULus Certified
- UL Wet Rated
- Field Adjustable Wattage/Light Output and CCT

Mounting Options

- Back-plated design with template to mount directly over a standard recessed junction box for surface mounting

*Varies by fixture configuration

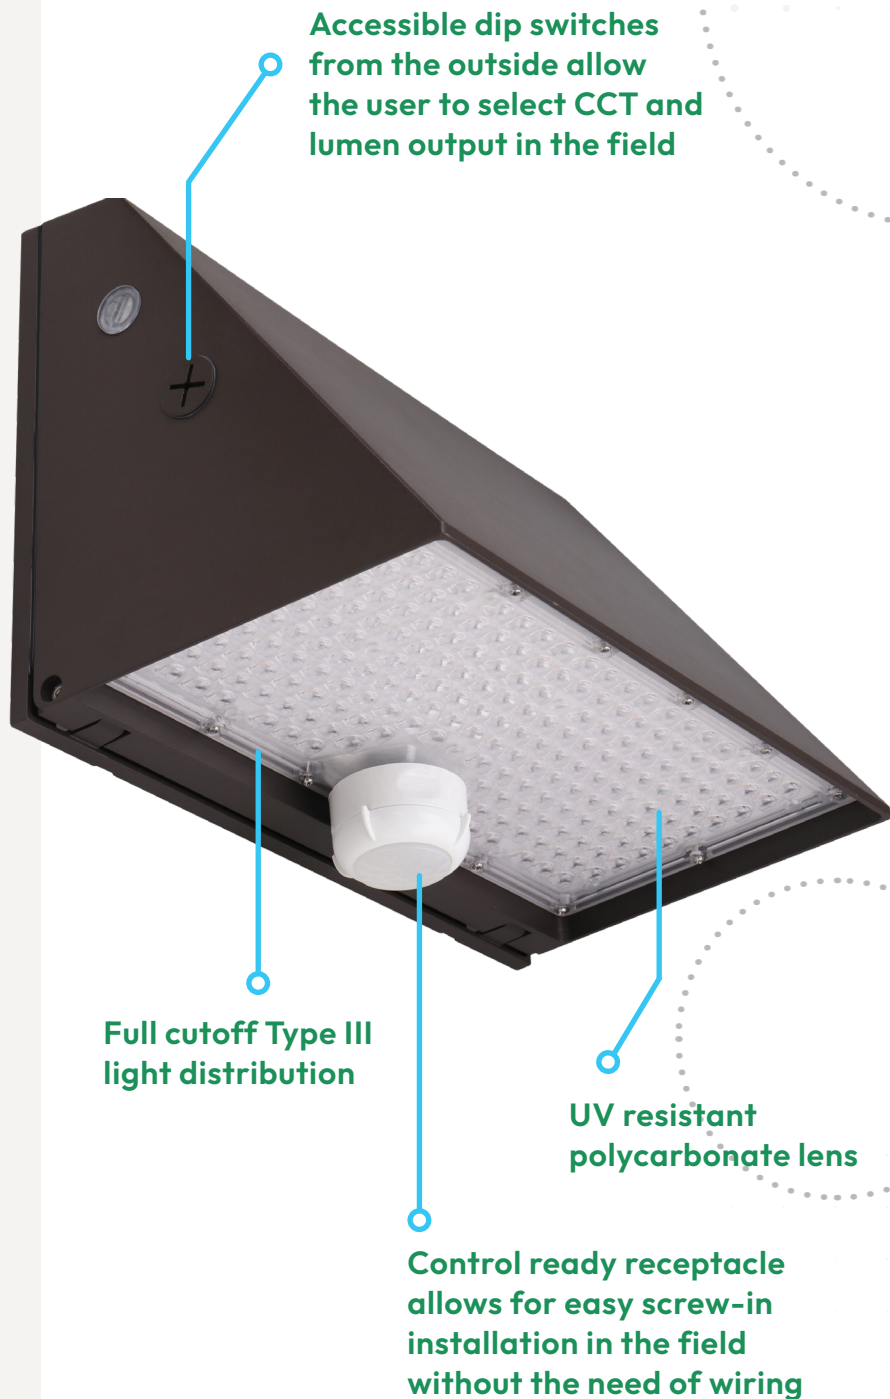

Accessible dip switches from the outside allow the user to select CCT and lumen output in the field

Full cutoff Type III light distribution

UV resistant polycarbonate lens

Control ready receptacle allows for easy screw-in installation in the field without the need of wiring