

LED TROFFER

HARRIS LED TROFFER, GEN 2

LTHE2 SPECIFICATIONS

Fixture Sizes

- 1' x 4', 2' x 2', or 2' x 4'

Lumen Range / LPW

- 2,000 to 8,000 Lumens, up to 158 LPW

Factory Installed Features and Options

- 120-277v and 347v
- 80 CRI; 3500K, 4000K, or 5000K
- Battery Backup
- Different Dimming Capacity Drivers
- Dial Dimmer
- Britex™ Coating

Field Installed Options

- Seismic Cable

Control Types Available

- Factory Installed Controls and Sensors Available
- Manual Programming Sensors
- Remote Programming Sensors
- On Site Network Programming
- Internet/Cloud Based Network Programming

Certifications / Listings*


- Buy American Act Compliant
- UL/cUL Listed
- DLC® Listed Standard
- BABA Compliant
- CA Title 20 Compliant Battery Backup Available

Mounting Options

- Recessed Mounting for T-Bar Grid Systems

Dial dimmer available for field adjustment of power and lumen output option

Title 24 compliant seismic cable kit available that easily attaches to the fixture housing

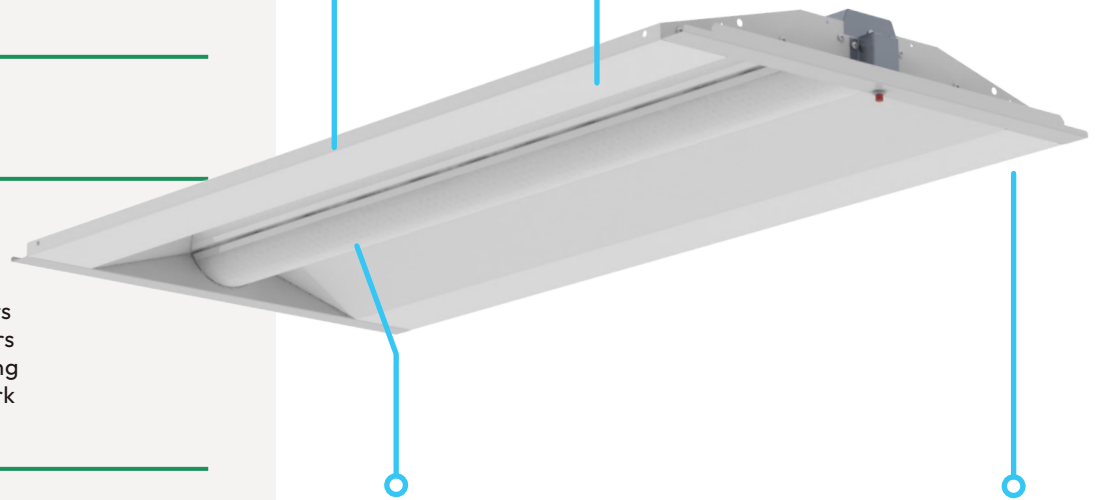

Wide light distribution reduces wall and ceiling dark spaces

Britex™ coating available with antimicrobial properties to eliminate contaminants that come in contact with the unit

**Varies by fixture configuration*

800.660.9340 | orionlighting.com

© 2024 Orion Energy Systems, Inc. All right reserved. The Orion logo, ISON™, TritonPro™, and Harris product names are registered trademarks of Orion Energy Systems. All other trademarks are property of their respective owners.

P-INT-XS-233 | Rev. 20241125