

MPHL2 HARRIS MULTIPURPOSE LINEAR, GEN2




HIGH PERFORMANCE
168 LPW
 HIGH PERFORMANCE




1 4.5x LIFE*
 MPHL2 calculated L70 rating of 238,000 hours is a minimum of 4.5x as long as the typical LED tube retrofit alternative.

2 INSTALLATION FLEXIBILITY
 Innovative design allows for a continuous run in four foot increments. Save on labor costs with the wire harness option that provides left, right, and center electrical connection for a clean and fast installation. Easy to order tandem hardwire kits available for tandem/continuous run fixtures.

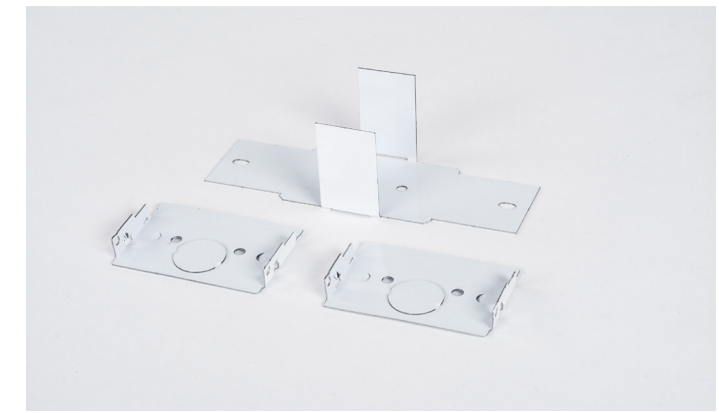

CONTINUOUS RUN KIT

3 FACTORY INSTALLED OPTIONS
 Battery Back Up, 20kV/10kA Surge Protection and Plastic End Caps available. Multiple integrated control and sensor options allow for additional energy savings.



Battery Back Up



Plastic End Caps



ENx



Px

5 LENS DIFFUSION
 Sleek, frosted matte lens provides LED diffusion in the work place.

6 SUPERIOR EFFICACY
 Up to 168 LPW efficacy delivers incredible energy savings.

4 FIELD INSTALLED OPTIONS
 Fixture wireguard and end mounted control options for field installation.



Available in lumen packages from 2,000 to 6,000 lumens in 4' and 4,000 to 12,000 lumens in 8'. 347V
 *LED rated life based on MPHL20404LUNVFD840LAFG L70 @ 25C ambient vs. Orion's TLEDB5 retrofit LED tubes.

