ISON™ GEN III HIGH BAY




2 4x LIFE

The HBIF3 L70 rating at 218,000 hours is a minimum of 4x as long as the typical LED tube retrofit alternative while providing full configurability, controllability, more energy savings and a new look.



LUMENS PER WATT Recognized in the industry as the highest performing LED high bay at 214 LPW.

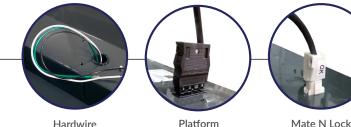



Hardwire

3

Mate N Lock

CONFIGURABLE POWER CONNECTIONS Hardwire and plug and play power connections available. Configured per order.

4



FULL FRAME DESIGN Patent pending full frame design delivers sleek aesthetic and durable smooth surfaces that protect your fixtures components from dust and debris.



From brands including Nichia, Samsung and Philips.

MODULAR LENS

Patent pending lens system provides glare control. Also available in a polycarbonate clear lens or no lens option.

SUPERIOR **THERMAL DESIGN**

6

Reduces the operating temperature which leads to longer life of electronic components.

LIGHTWEIGHT ALUMINUM Reduces ceiling grid

load, installs faster with minimal impact on operations, and maximizes heat transfer.

CONTROLS & ACCESSORIES Hundreds of factory or field

installed options available.



Available in lumen packages from 11,000 to 24,000 lumens. 120v-277v, 347v-480v *LED rated life based on HBIF3C1OAUNVFDXX850NL L70 @ 25C ambient vs. Orion's TLEDB5 retrofit LED tubes.





SAMPLE INSTALL





Battery Backup





Integrated Control

