

AHP2

ISON® AREA LIGHT HIGH PERFORMANCE, GEN 2



1 ROBUST CONSTRUCTION

Heavy-duty one-piece die-cast aluminum housing and anti-corrosion stainless steel hardware. Tool-less access to electronic components for installation and maintenance

2 ELECTRICAL FLEXIBILITY

120-277V and 200-480V input. Standard 10kV surge protection per ANSI recommendations for outdoor environments

3 MULTIPLE CONFIGURATIONS


9,000 to 52,000 lumens with efficacy up to 185 LPW. Offered in 3000K, 4000K, and 5000K CCT in 80CRI



REPLACEABLE LENSES



BACK SHIELD

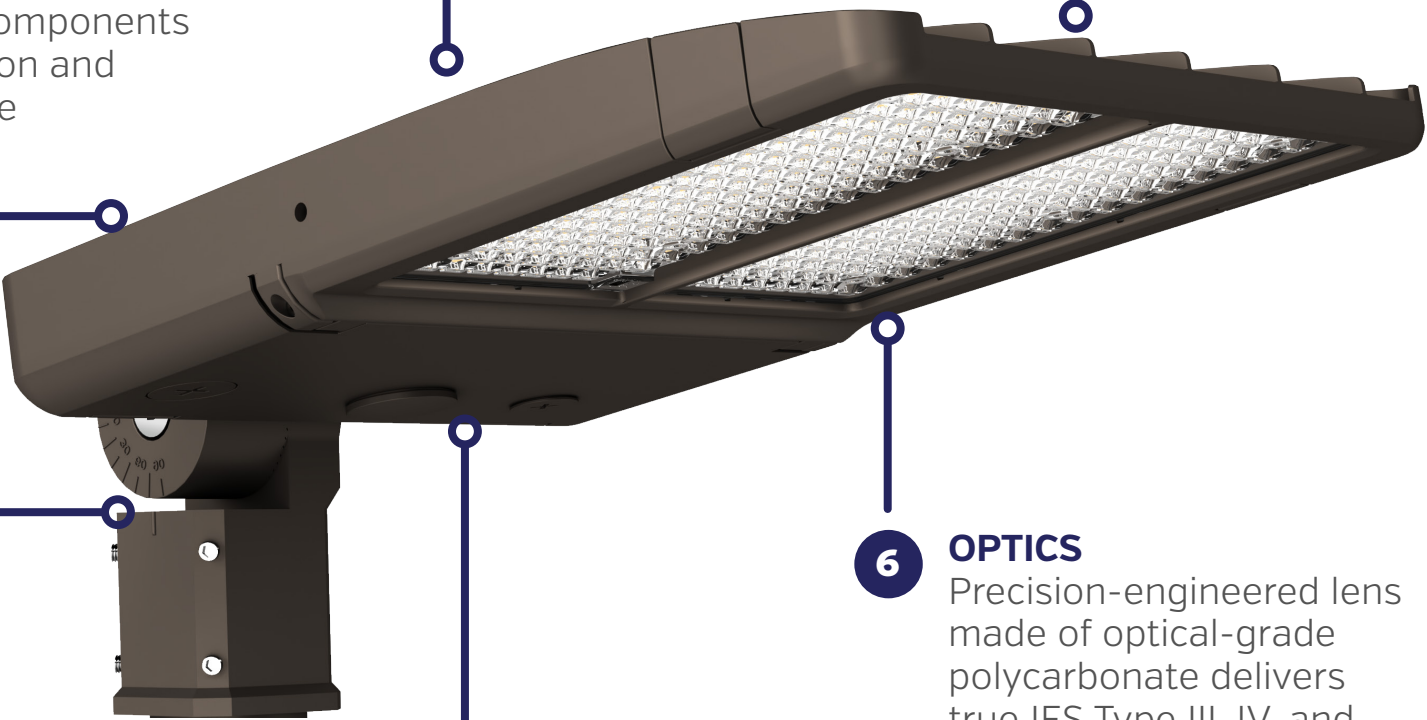

4 MOUNTING

Slipfitter, universal square and round pole mounts, adjustable pole mounting, trunnion, and wall mounting options available

5 CONTROLS

Control-ready for field-installed standalone, Bluetooth Mesh, and network controls. Optional NEMA 7-pin receptacles

6 OPTICS

Precision-engineered lens made of optical-grade polycarbonate delivers true IES Type III, IV, and V distributions. Tool-less design allows quick lens field replacement

MOUNTING



Slipfitter

Universal

Adjustable/Wall

Trunnion

