


LMAF2 ISON™ LINEAR LED HIGH BAY FIXTURE, GEN 2



1 3x LIFE
The LMAF2 L70 rating at 172,000 hours is a minimum of 3x as long as the typical LED tube retrofit alternative.

2 LIGHTWEIGHT ALUMINUM
Fixture size available in 4' and 8' lengths. Aluminum construction reduces ceiling grid load and maximizes heat transfer to support longer component life.

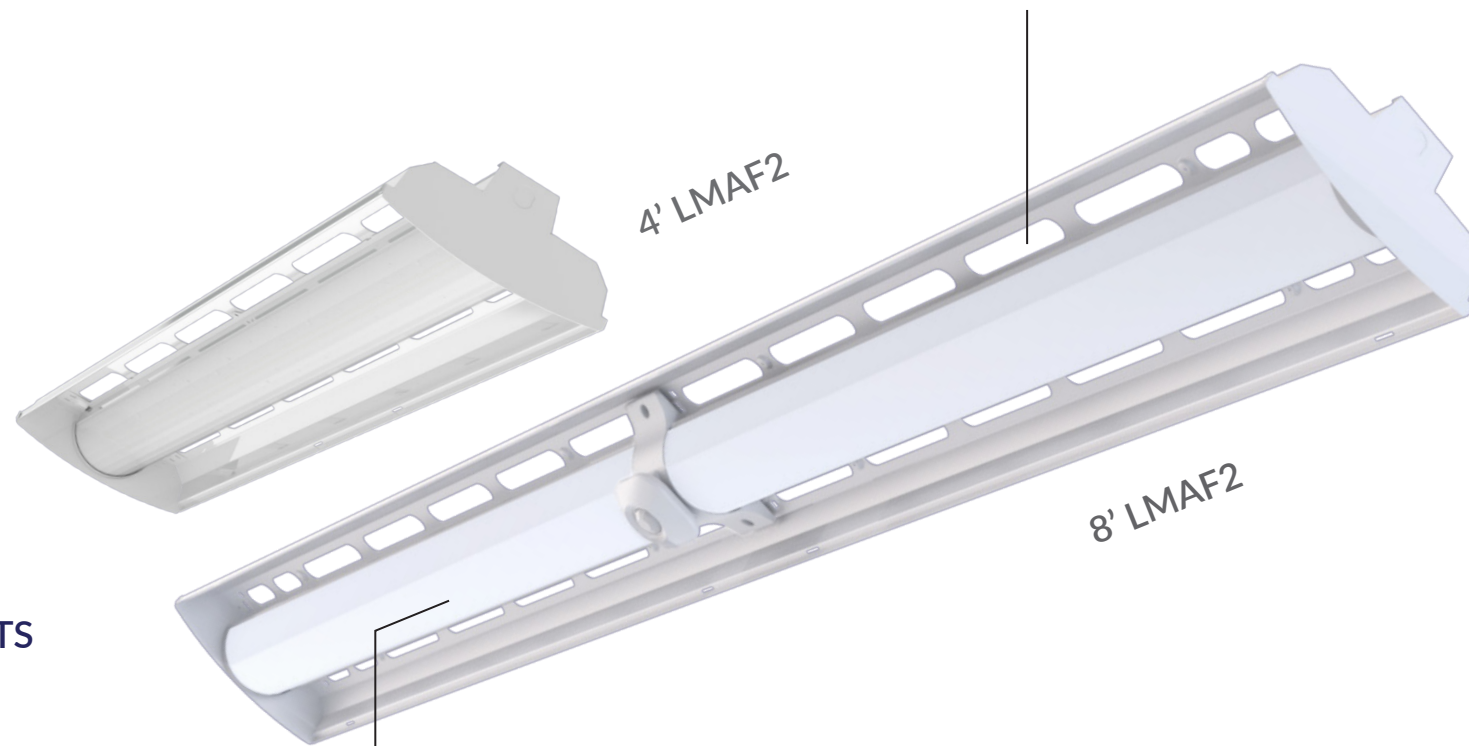

3 JOBSITE FRIENDLY PACKAGING
Single fixture packaging for ease of handling throughout jobsite and maneuverability on lifts.

4 EASE OF INSTALLATION
Factory pre-assembled for ease of installation. Multiple suspended mounting options available.

7 PREMIUM COMPONENTS
Energy efficient with up to 171 LPW. Engineered with efficient and durable electronic components from the industry's most trusted brands.

6 GLARE CONTROL
Frosted acrylic lens system provides greater diffusion of LEDs. Also available with no lens option.

5 UPGRADE AESTHETICS
Upgrade to LED technology with appealing curved lens while maintaining visibility of up-light housing.

CONTROL DEVICE READY
LMAF2 8' factory installed sensor with IoT control capabilities.



Integrated Control

Available in lumen packages 9,000 lumens in 4' and 18,000 lumens in 8'. 120v-277v, 347v, 480v
*LED rated life based on LMAF218LUNVFD840LAFG L70 @ 25C ambient vs. Orion's TLEDB5 retrofit LED tubes.

