

# LED RETROFIT LINEAR HIGH BAY

ISON™ LINEAR LED MODULE RETROFIT, GEN 2

## LMAR2 SPECIFICATIONS

### Fixture Sizes

- 4' or 8' Retrofit Lengths; 2 Widths Available per Length

### Lumen Range / LPW

- 9,000 or 18,000 Lumens, up to 171 LPW

### Factory Installed Features and Options

- 120-277v, 347v and 480v
- 80 CRI; 4000K
- Two Light Distribution Options: No Lens or Frosted Acrylic Lens


### Field Installed Options

- Field Installed Control Options
- Onsite Network Programming
- Internet/Cloud Based Network Programming

### Certifications / Listings\*

- Buy American Act Compliant
- UL/cUL Listed
- DLC® Listed Standard

Retrofit light engine is designed to fit in existing linear fluorescent high or low bay fixture channels for ease of install

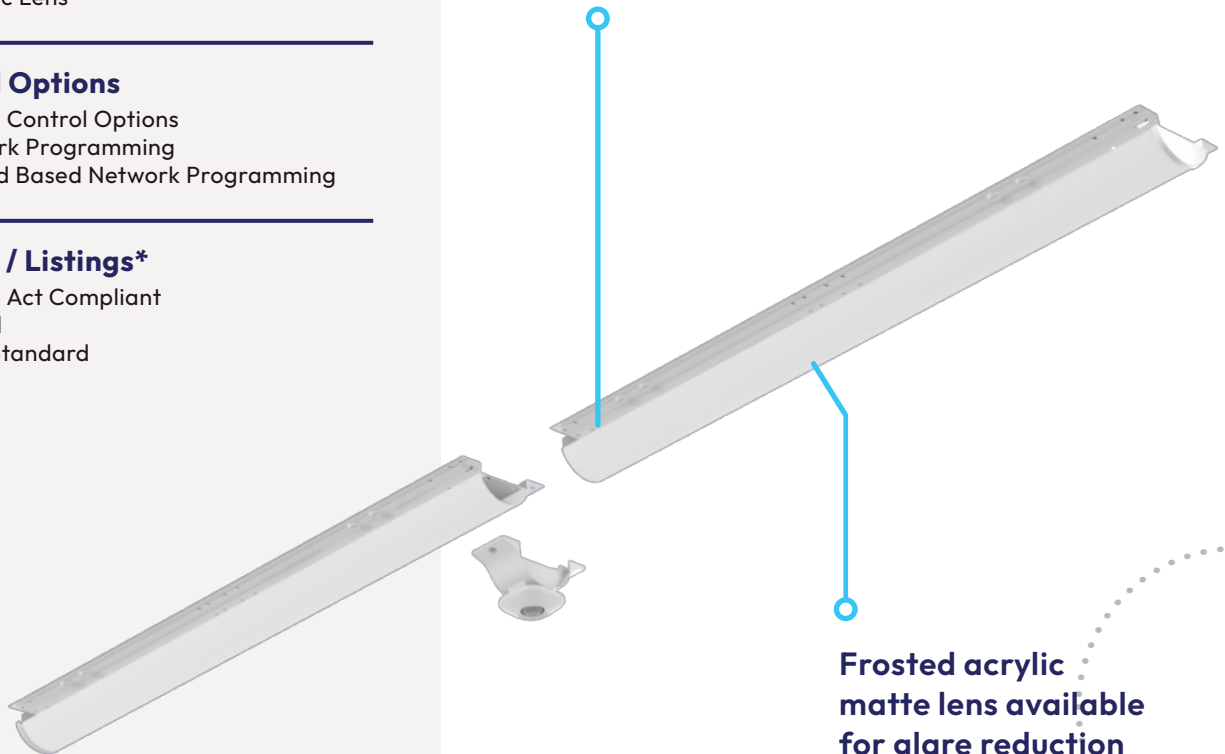

Frosted acrylic matte lens available for glare reduction

\*Varies by fixture configuration

800.660.9340 | [orionlighting.com](http://orionlighting.com)

© 2024 Orion Energy Systems, Inc. All right reserved. The Orion logo, ISON™, TritonPro™, and Harris product names are registered trademarks of Orion Energy Systems. All other trademarks are property of their respective owners.

P-INT-XS-222 | Rev. 20241125