

LINEAR STRIP

TRITONPRO™ COMMERCIAL SELECTABLE STRIP LIGHT, GEN 1

CSSL1 SPECIFICATIONS

Fixture Sizes

- 2', 4' or 8'

Lumen Range / LPW

- 1,000 to 10,400 Lumens
- Each fixture model allows for field adjustment of lumen output

Factory Installed Features and Options

- 120v-277v
- 80 CRI; Field Adjustable CCT from 3000K 3500K, 4000K, 5000K and 6500K
- Frosted Lens
- Battery Backup Available
- Hardwired Standard
- Standalone Control

Field Installed Options

- Control Options
- Battery Backup Kit
- Continuous Mounting Plate

Control Types Available

- Factory and field-installed standalone and bluetooth control options


Certifications / Listings*

- cULus Listed
- UL Listed Damp
- DLC® Listed Standard
- FCC Certified
- RoHS Compliant
- Field Adjustable Wattage/Light Output and CCT

Mounting Options

- Surface Mounting
- Suspended Mounting
- Continuous End-to-end Connection

Frosted high impact polycarbonate lens

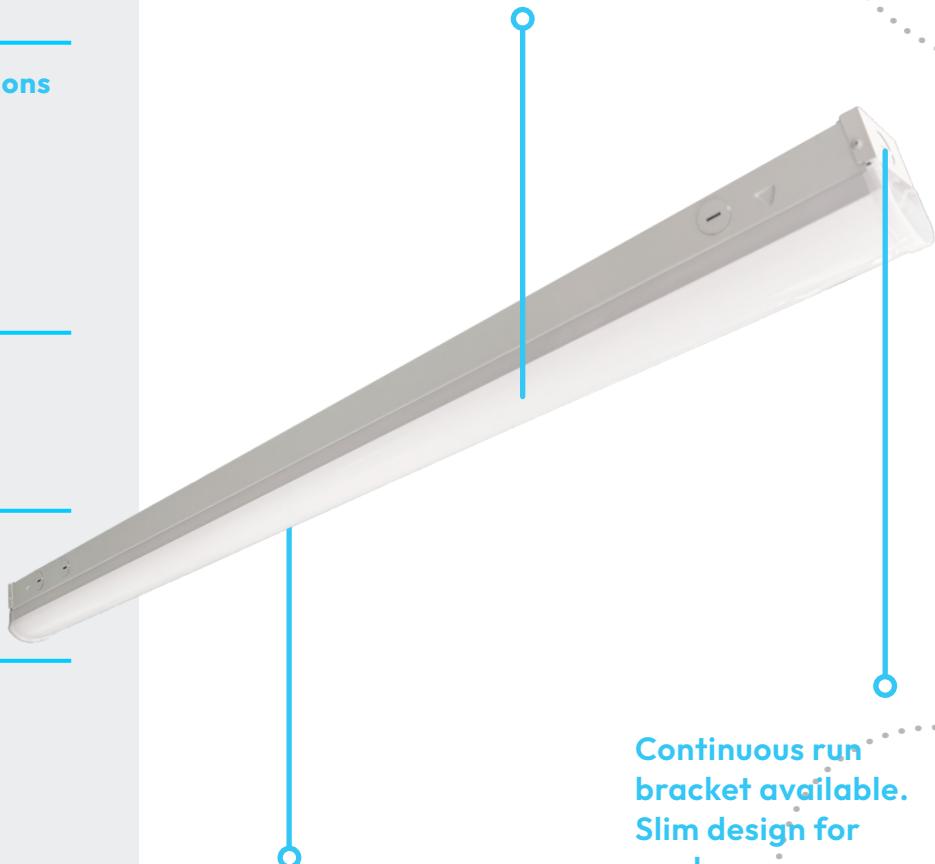

Continuous run bracket available. Slim design for modern appearance

Easily adjustable dip switches allow 5 different selections of light output and CCT