

# LED LINEAR RETROFIT

## TRITONPRO™ LED LUMEN SELECT STRIP RETROFIT, GEN 2

### LSSR2 SPECIFICATIONS

#### Fixture Sizes

- 4' or 8' Retrofit Lengths



#### Lumen Range / LPW

- 3,000 to 10,000 Lumens, up to 148 LPW. Each lumen package allows for field adjustment of lumen output



#### Factory Installed Features and Options

- 120-277v
- 80 CRI; Field Adjustable CCT from 3500K, 4000K, and 5000K
- Polycarbonate Frosted Lens Standard
- Battery Backup

#### Field Installed Options

- Field Installed Control and Sensors
- Remote Programming Sensors


#### Control Types Available

- Factory or Field Installed Control and Sensor Options
- Manual Programming Sensors

#### Certifications / Listings\*

- UL/cUL Listed
- UL Damp Rated
- Field Adjustable Wattage/Light Output and CCT
- DLC® Listed Standard
- Field Adjustable Wattage/Light Output and CCT
- CA Title 20 Compliant Battery Backup Available

\*Varies by fixture configuration

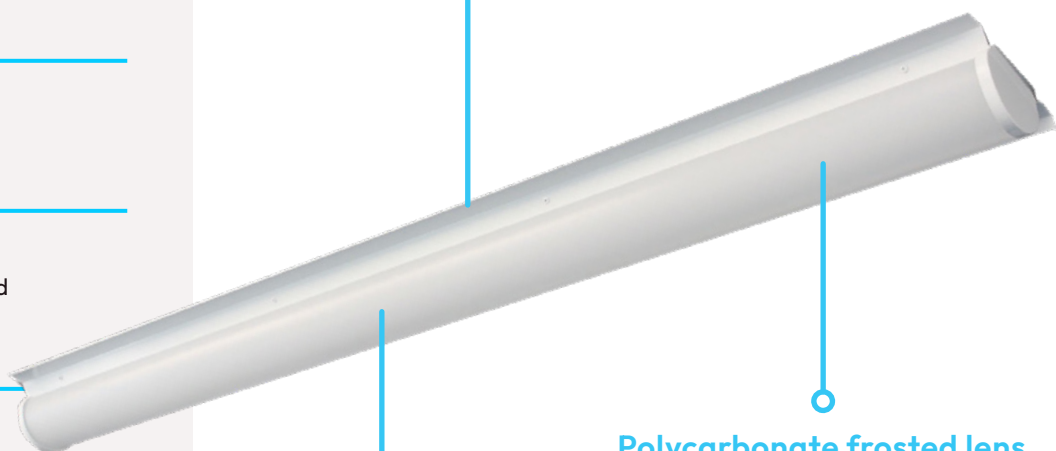

Safety cables come standard for ease of field install

Polycarbonate frosted lens

Easy CCT and lumen output adjustment in the field